


## BOWDEN CABLE CONTROL 270-301-EZ CONCEALED CEILING CONTROL KIT WITH MOUNTING BRACKET AND DIAL INDICATOR

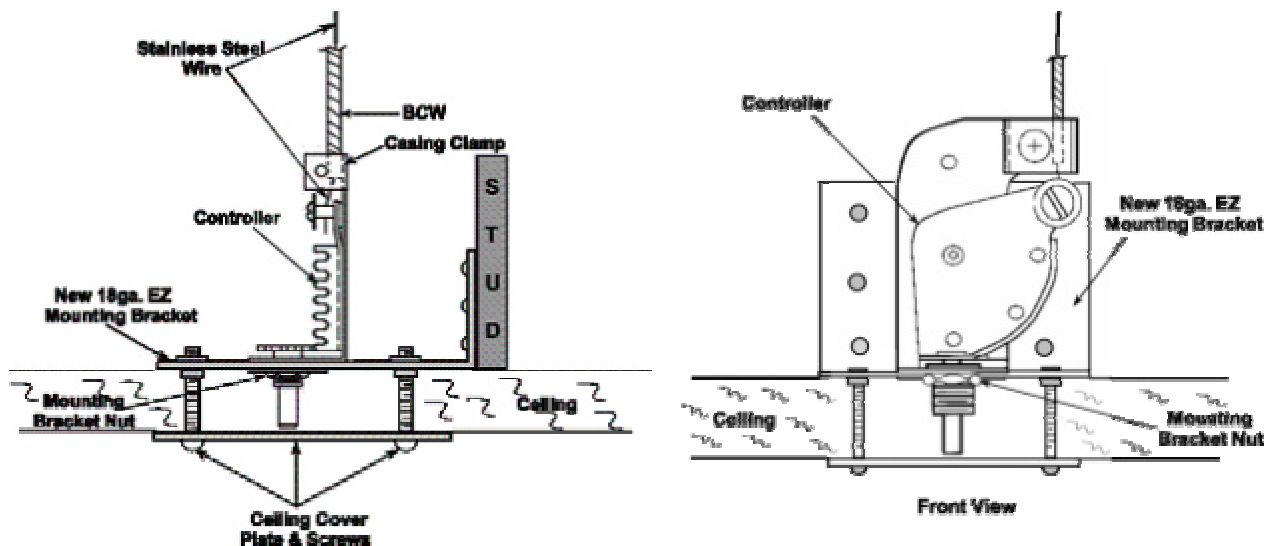

1. Install controller on “EZ” mounting bracket as illustrated using mounting bracket nut.
2. Push dial indicator on flatted shaft and secure with push on retaining ring.
3. Cut a hole 2 - 1/2" dia. in desired location for ceiling regulator. Hole should be located below a stud to which the bracket will be fastened.
4. Install “EZ” mounting bracket onto ceiling stud or directly on ceiling using mounting screws by others.
5. Thread inner stainless wire through outer galvanized wire casing. (Make sure wire is 5” longer than casing.)
6. Attach casing to controller with casing clamp.
7. Thread wire through hole in wire stop and tighten set screw onto wire. Rotate shaft with control wrench until controller is in the position shown in diagram (full closed).
8. Secure cover plate to bracket in ceiling using cover plate screws.
9. Proceed with damper hardware installation.

**Note:** To balance system, remove cover plate to turn control shaft using #030 control wrench. Intermittent positive stop will allow damper to open and close and lock damper blade in place between open and close.