


## BOWDEN CABLE CONTROL 270-302 WALL MOUNTED CONCEALED CONTROL KIT

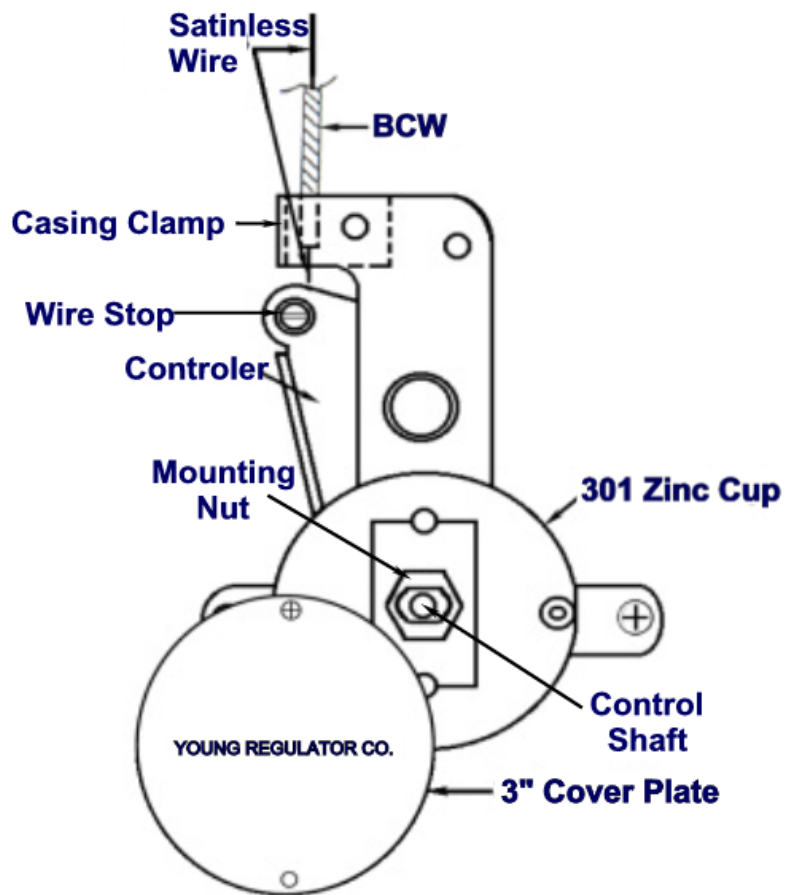

1. Install controller to mounting cup using mounting bracket nut.
2. Thread wire through casing and attach to controller with casing clamp.
3. Thread wire through hole in wire stop and tighten set screw of wire stop on wire. Rotate shaft with control wrench until controller is in the position shown in diagram (full closed).
4. Cut hole in wall and feed casing and wire up wall to damper. Attach cup to support ( fasteners by others).
5. Secure cover plate to base using screws provided.
6. Proceed with damper hardware kit.

**Note:** To balance system, remove cover plate to turn control shaft using #030-12 control wrench. Intermittent positive stop will allow damper to open and close and lock damper blade in place between open and close.