


## BOWDEN CABLE CONTROL 270-700 WALL CONTROL KIT WITH KNOB

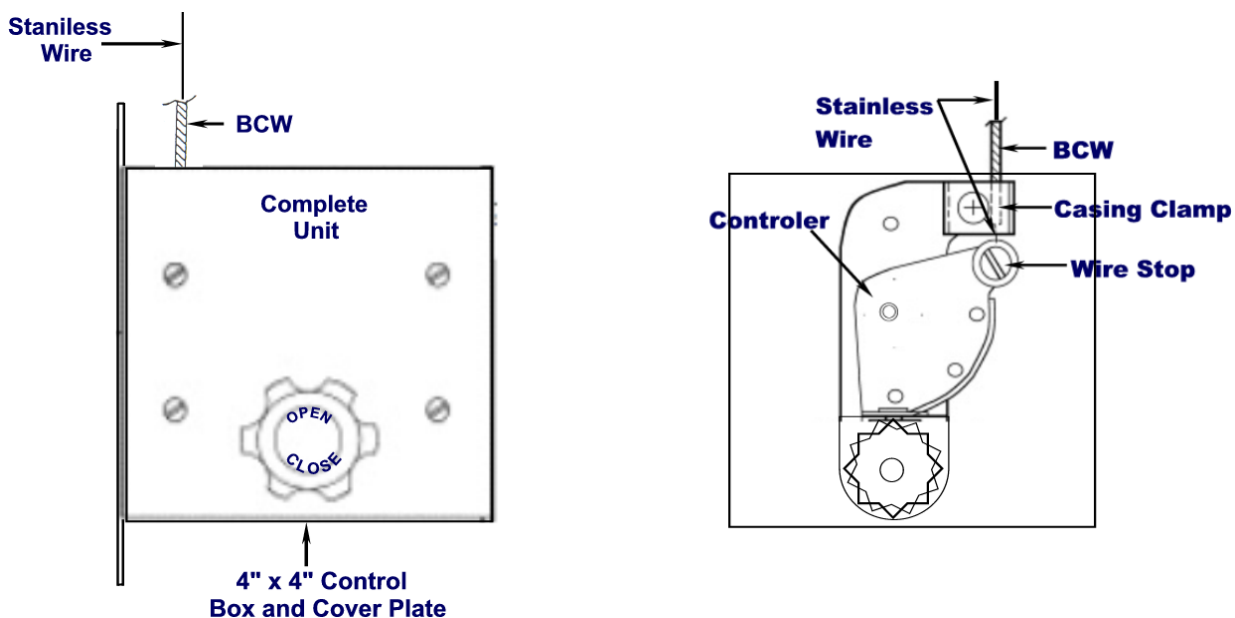

1. Loosen set screw on side of knob with 5/64 hex key to remove knob.
2. Remove face plate from electrical box.
3. Remove mounting plate to reveal rack and pinion controller.
4. Cut casing to proper length and wire 6" longer than casing.
5. Thread stainless steel wire through galvanized steel casing.
6. Feed casing and wire through hole in top of electrical box and secure casing to the controller with casing clamp. Insert wire through wire stop and with controller in position shown, (full closed) tighten wire stop screw onto wire.
7. Reattach mounting plate to electrical box with controller into wall, reattach cover plate and knob.
8. Proceed with damper hardware kit installation guide.

**Note:** To balance system, turn control knob clockwise to open, counterclockwise to close. Intermittent positive stop will allow damper to open and close and lock damper blade in place between open and close.