



Young Regulator Co.

7100 Krick Rd • Walton Hills, OH 44146

P: 440-232-9700 • F: 440-232-8266

www.youngregulator.com

EBD Options & Accessories

Terminations, Cables, & Positioners

TERMINATION

- Choose one of the following for each EBD damper.
- Note: EBD-WALL only requires 1 port for each damper

1. EBD-WALL:


Available in 1, 2, 4, 6, & 12 ports.
Includes UL listed non-metallic LV-1 Bracket
EBD-WALL through EBD-WALL-6 wall-plate = 2.75" x 4.5"
EBD-WALL-12 Double Gang Box wall-plate = 4.625 x 4.5"

2. EBD-301:

Concealed Ceiling Cup with 3" zinc cover-plate.
Optional; Stainless-steel or primer cover-plate for paint (Pictured)

3. EBD-VM:

Hook-&-Loop Fastener secures cable in a preferred location.
Commonly installed on diffuser or behind a grille.

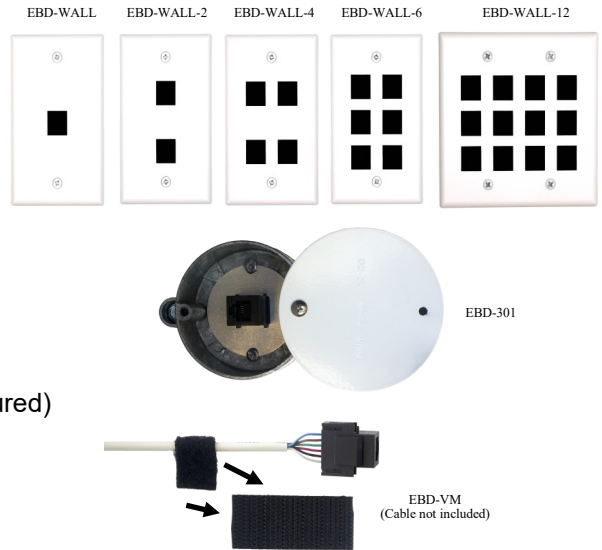

CABLE

- "22 / 6" non-shielded plenum rated wire
- Available in standard 10, 25, 50, 75, or 100 foot lengths.
- Custom cables available in lengths up to 1,000 feet.

1. EBDC: Cable for standard EBD series dampers
2. EBDLC: Cable for Large EBDL series dampers
3. EBDC-EXT: Cable Extensions



RJ-12 (Female):

Inserts into preferred termination for direct connection to positioner.

DELPHI:

Plugs directly into EBD motor
(Excludes EBDL series)

POSITIONER

- Only one positioner required to control all damper per job.

1. EBDP

Used on standard EBD series dampers.
LCD Blade Position Indicator - (1) 9V battery (included).

2. EBDP-L

Used on large EBDL series dampers.
LCD Blade Position Indicator - (3) 9V batteries. (included)

3. DCDP

Used on standard DCD series dampers
NO Blade Position Indication - (1) 9V battery (included).



Termination	Quantity	Cable Type / Length	Quantity	Notes
Project				Location
Contractor				Design Specifier